



OCELOVÁ STAVEBNÍ KOTVA BVM 51 - 04

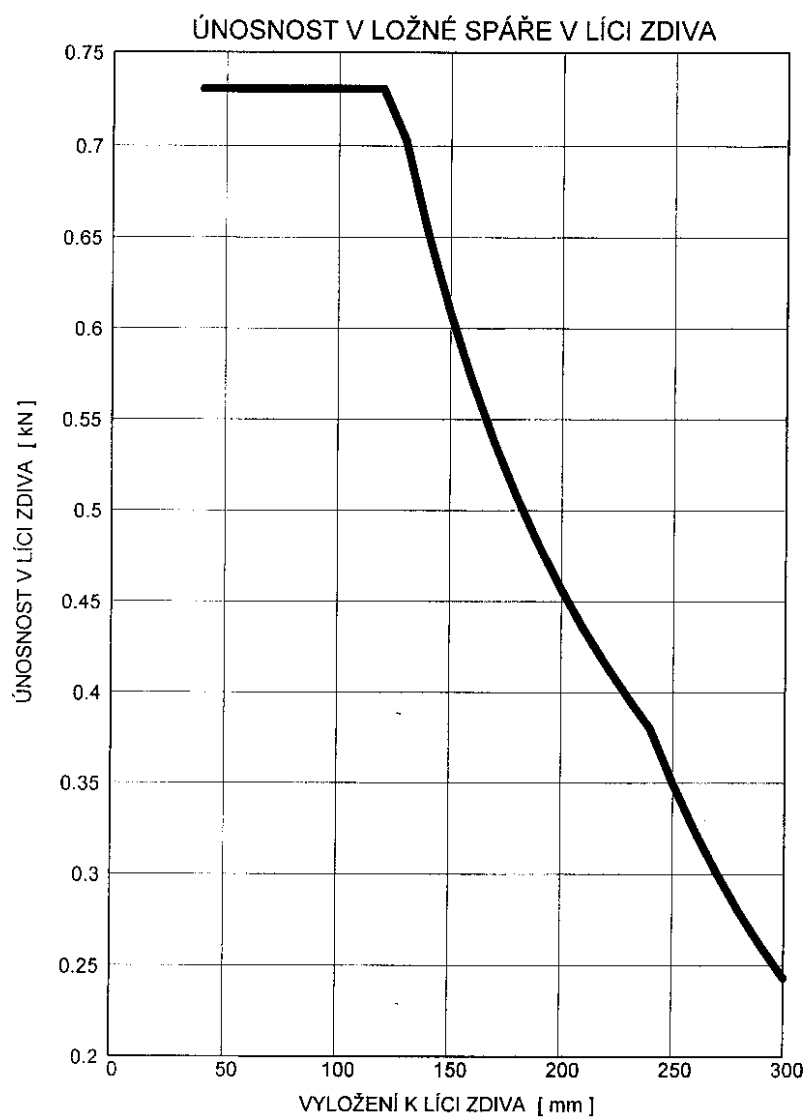

Vyložení (mm)	Únosnost	Délka kotvy (mm)
cl	Fl (cl)	Lko (cl)
40	0.73 kN	290
50	0.73 kN	300
60	0.73 kN	310
70	0.73 kN	320
80	0.73 kN	330
90	0.73 kN	340
100	0.73 kN	350
110	0.73 kN	360
120	0.73 kN	370
130	0.702 kN	380
140	0.652 kN	390
150	0.608 kN	400
160	0.57 kN	410
170	0.537 kN	420
180	0.507 kN	430
190	0.48 kN	440
200	0.456 kN	450
210	0.435 kN	460
220	0.415 kN	470
230	0.397 kN	480
240	0.38 kN	490
250	0.35 kN	500
260	0.324 kN	510
270	0.3 kN	520
280	0.279 kN	530
290	0.26 kN	540
300	0.243 kN	550

Délka kotvy je stanovena pro cihelné zdivo z cihel 15 na maltu 25 (tl. zdiva min. 450 mm)

OCELOVÁ STAVEBNÍ KOTVA BVM 51 - 04

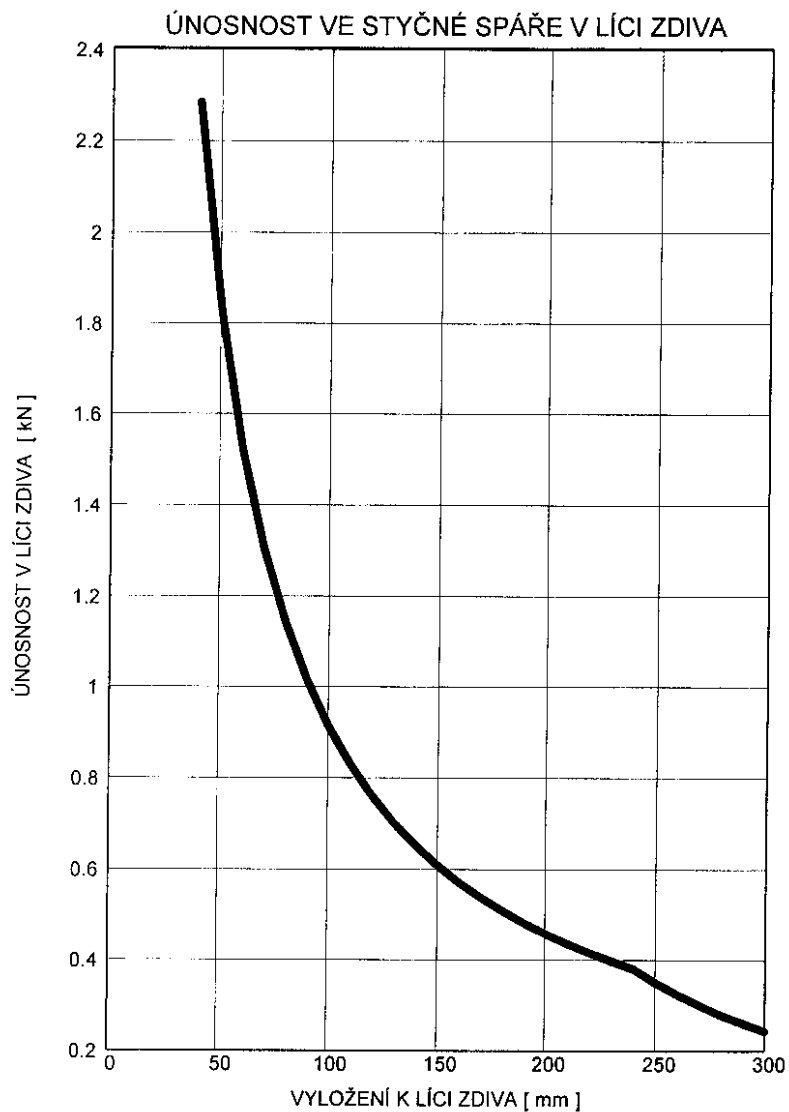

Vyložení (mm)	Únosnost	Délka kotvy (mm)
cs	Fs (cs)	Lko (cs)
40	2.282 kN	290
50	1.825 kN	300
60	1.521 kN	310
70	1.304 kN	320
80	1.141 kN	330
90	1.014 kN	340
100	0.913 kN	350
110	0.83 kN	360
120	0.761 kN	370
130	0.702 kN	380
140	0.652 kN	390
150	0.608 kN	400
160	0.57 kN	410
170	0.537 kN	420
180	0.507 kN	430
190	0.48 kN	440
200	0.456 kN	450
210	0.435 kN	460
220	0.415 kN	470
230	0.397 kN	480
240	0.38 kN	490
250	0.35 kN	500
260	0.324 kN	510
270	0.3 kN	520
280	0.279 kN	530
290	0.26 kN	540
300	0.243 kN	550

Délka kotvy je stanovena pro cihelné zdivo z cihel 15 na maltu 25 (tl. zdiva min. 450 mm)