



# OCELOVÁ STAVEBNÍ KOTVA BVM 51 - 06

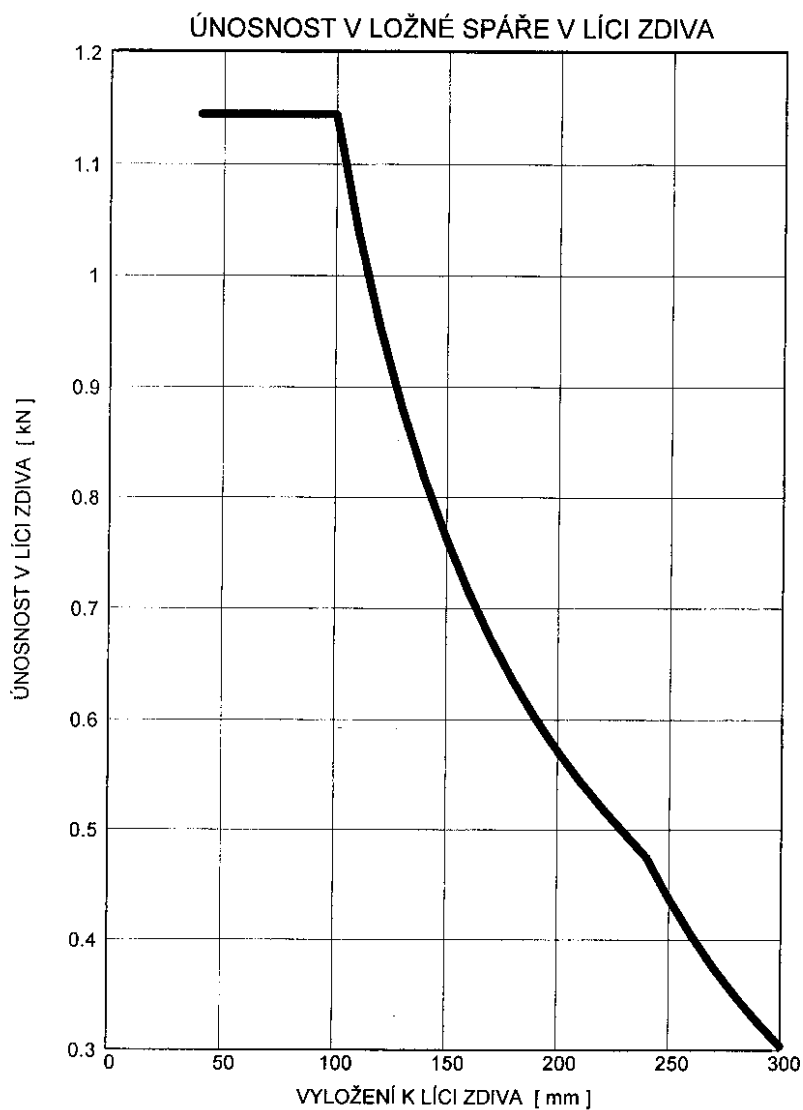

Vyložení (mm)	Únosnost	Délka kotvy (mm)
cl	Fl (cl)	Lko (cl)
40	1.143 kN	350
50	1.143 kN	360
60	1.143 kN	370
70	1.143 kN	380
80	1.143 kN	390
90	1.143 kN	400
100	1.143 kN	410
110	1.039 kN	420
120	0.953 kN	430
130	0.879 kN	440
140	0.817 kN	450
150	0.762 kN	460
160	0.715 kN	470
170	0.673 kN	480
180	0.635 kN	490
190	0.602 kN	500
200	0.572 kN	510
210	0.544 kN	520
220	0.52 kN	530
230	0.497 kN	540
240	0.475 kN	550
250	0.438 kN	560
260	0.404 kN	570
270	0.375 kN	580
280	0.349 kN	590
290	0.325 kN	600
300	0.304 kN	610

Délka kotvy je stanovena pro cihelné zdivo z cihel 15 na maltu 25 ( tl. zdiva min. 450 mm)

# OCELOVÁ STAVEBNÍ KOTVA BVM 51 - 06

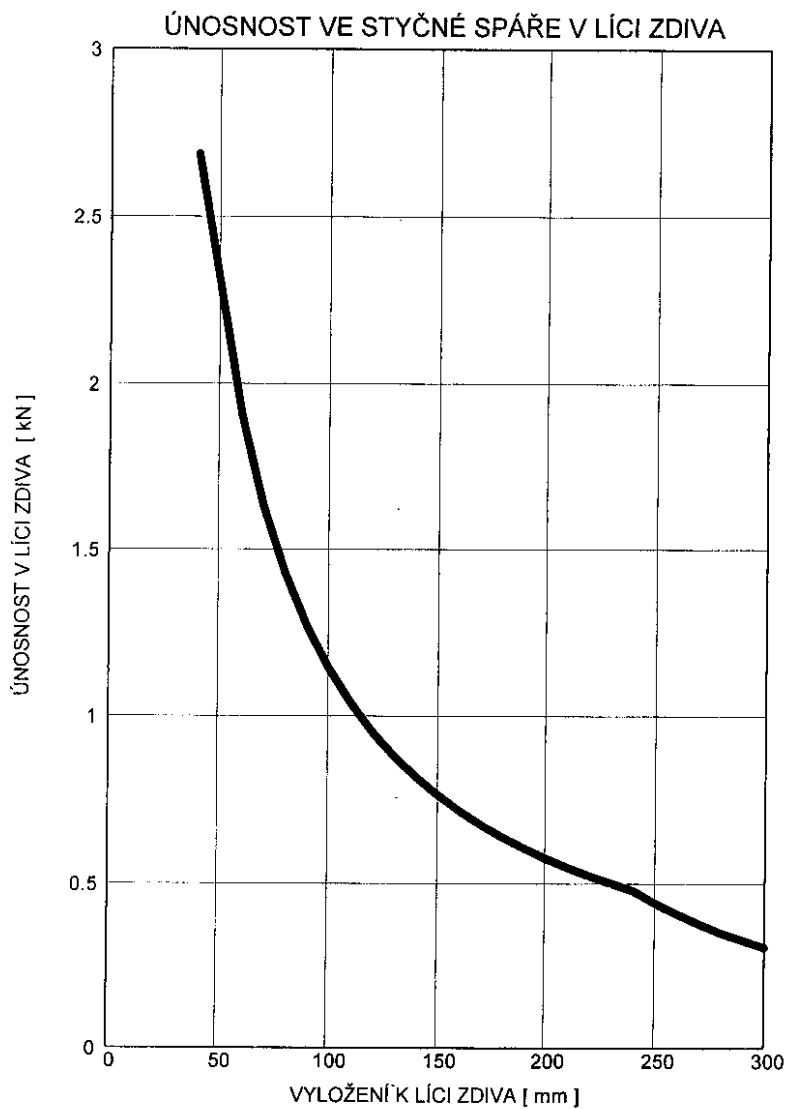

Vyložení (mm)	Únosnost	Délka kotvy (mm)
cs	Fs (cs)	Lko (cs)
40	2.686 kN	350
50	2.287 kN	360
60	1.905 kN	370
70	1.633 kN	380
80	1.429 kN	390
90	1.27 kN	400
100	1.143 kN	410
110	1.039 kN	420
120	0.953 kN	430
130	0.879 kN	440
140	0.817 kN	450
150	0.762 kN	460
160	0.715 kN	470
170	0.673 kN	480
180	0.635 kN	490
190	0.602 kN	500
200	0.572 kN	510
210	0.544 kN	520
220	0.52 kN	530
230	0.497 kN	540
240	0.475 kN	550
250	0.453 kN	560
260	0.438 kN	570
270	0.424 kN	580
280	0.41 kN	590
290	0.397 kN	600
300	0.384 kN	610

Délka kotvy je stanovena pro cihelné zdivo z cihel 15 na maltu 25 ( tl. zdiva min. 450 mm)